


ProSeries® Rekeyables Component Parts

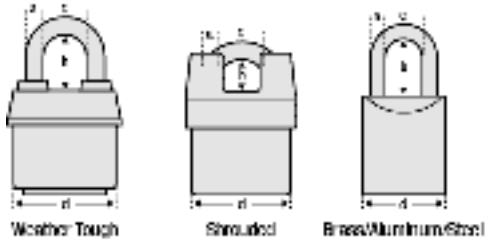


	Model #	Vertical Shackle Clearance (b)	Components							
			Shackle	Ball Bearings	Cylinder	Trap Door	Actuator		Flared Nut	Screw
			A	B	C	D	NKR*	NRK**	E	F
Weather Tough®	2-1/8" Wide Laminated Steel Body. Shackle Dimensions: a: 5/16" c: 7/8"									
	6121	1-1/8"	293S6121	6121-0427	See List Page 18	6121-0420	6121-0423	6121-0424	6121-0421	6121-0422
	6121LF	1-1/2"	293LF6121							
	6121LJ	2-3/8"	293LJS6121							
	6121LN	5-3/4"	293LNS6121							
	2-3/8" Wide Laminated Steel Body. Shackle Dimensions: a: 3/8" c: 7/8"									
	6125	1-3/8"	293S6125	6121-0427	See List, P. 18	6121-0420	6121-0423	6121-0424	6121-0421	6121-0422
	6125LJ	2-3/8"	293LJS6125							
	2-5/8" Wide Laminated Steel Body. Shackle Dimensions: a: 7/16" c: 7/8"									
	6127	1-3/8"	293S6127	6121-0427	See List Page 18	6121-0420	6121-0423	6121-0424	6121-0421	6121-0422
6127LH	1-7/8"	293LHS6127								
6127LJ	2-3/8"	293LJS6127								
6127LN	5-3/4"	293LNS6127								
Iron Shroud	2-1/8" Wide Laminated Steel Body. Shackle Dimensions: a: 5/16" c: 7/8"									
	6321	3/4"	293S6321	6121-0427	See List, P. 18	6121-0420	6121-0423	6121-0424	6121-0421	6121-0422
	2-3/8" Wide Laminated Steel Body. Shackle Dimensions: a: 3/8" c: 7/8"									
	6325	3/4"	293S6325	6121-0427	See List, P. 18	6121-0420	6121-0423	6121-0424	6121-0421	6121-0422
	2-5/8" Wide Laminated Steel Body. Shackle Dimensions: a: 7/16" c: 7/8"									
6327	3/4"	293S6327	6121-0427	See List, P. 18	6121-0420	6121-0423	6121-0424	6121-0421	6121-0422	
Solid Brass	1-9/16" Wide Solid Brass Body. Shackle Dimensions: a: 1/4" c: 25/32"									
	6830	1-1/16"	293S6830	0220-0302	See List Page 18	6830-0420	6831-0421	6831-0422	6121-0421	6121-0422
	6830B	1-1/16"	293B6830							
	6830LF	1-9/16"	293LFS6830							
	6830LT	3"	293LTS6830							
	1-3/4" Wide Solid Brass Body. Shackle Dimensions: a: 5/16" c: 29/32"									
	6840	1-3/16"	293S6121	6121-0427	See List Page 18	6121-0420	6841-0421	6121-0424	6121-0421	6121-0422
	6840B	1-3/16"	293B6840							
	6840LF	1-9/16"	293LFS6121							
	6840LJ	2-7/16"	293LJS6121							
6840BLJ	2-7/16"	293LJB6840								
6840LN	5-3/4"	293LNS6121								

* NKR **N**on **K**ey **R**etaining. Key can be removed anytime.

NRK **Non **R**emovable **K**ey. Key can only be removed if shackle is in locked position.

ProSeries® Rekeyables Component Parts

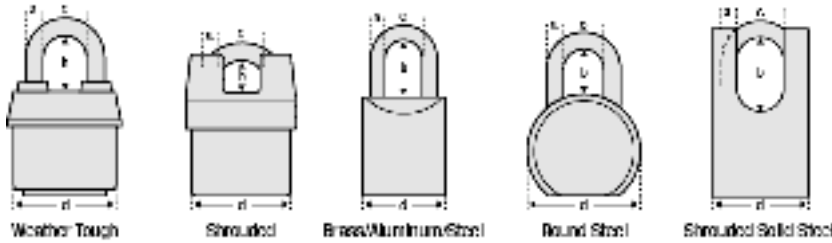

	Model #	Vertical Shackle Clearance (b)	Components							
			Shackle	Ball Bearings	Cylinder	Trap Door	Actuator		Flared Nut	Screw
			A	B	C	D	NKR*	NRK**	F	G
Solid Brass	2" Wide Solid Brass Body. Shackle Dimensions: a: 3/8" c: 29/32"									
	6850	1-1/2"	293S6125	6121-0427	See List Page 18	6121-0420	6841-0421	6121-0424	6121-0421	6121-0422
	6850B	1-1/2"	293B6850							
	6850LJ	2-1/2"	293LJS6125							
6850BLJ	2-1/2"	293LJB6850								
Solid Aluminum	1-9/16" Wide High Visibility Aluminum Body. Shackle Dimensions: a: 1/4" c: 25/32"									
	6835RED	1-1/16"	293S6830	0220-0302	See List Page 18	6830-0420	6831-0421	6830-0422	6121-0421	6121-0422
	6835LFRED	1-9/16"	293LF6830							
	68350RJ	1-1/16"	293S6830							
	6835LFORJ	1-9/16"	293LFS6830							
	6835YLW	1-1/16"	293S6830							
	6835LFYLW	1-9/16"	293LFS6830							
	6835GRN	1-1/16"	293S6830							
	6835LFGRN	1-9/16"	293LFS6830							
	6835BLU	1-1/16"	293S6830							
	6835LFBLU	1-9/16"	293LFS6830							
	6835BLK	1-1/16"	293S6830							
6835LFBLK	1-9/16"	293LFS6830								
Solid Steel	1-9/16" Wide Solid Steel Body. Shackle Dimensions: a: 1/4" c: 25/32"									
	7030	1-1/16"	293S6830	0220-0302	See List Page 18	6830-0420	6831-0421	6830-0422	6121-0421	6121-0422
	7030LF	1-9/16"	293LFS6830							
	7030LT	3"	293LTS6830							
	1-3/4" Wide Solid Steel Body. Shackle Dimensions: a: 5/16" c: 29/32"									
	7040	1-3/16"	293S6121	6121-0427	See List Page 18	6121-0420	6841-0421	6121-0424	6121-0421	6121-0422
	7040LJ	2-1/2"	293LJS6121							
	2" Wide Solid Steel Body. Shackle Dimensions: a: 3/8 c: 29/32"									
	7050	1-1/2"	293S6125	6121-0427	See List Page 18	6121-0420	6841-0421	6121-0424	6121-0421	6121-0422
	7050LJ	2-1/2"	293LJS6125							
2-1/2" Wide Round Solid Steel Body. Shackle Dimensions: A: 7/16" C: 7/8"										
6230	1-1/8"	293S6230	6121-0427	See List Page 18	6121-0420	6121-0425	6121-0426	6121-0421	6121-0422	
6230LH	2"	293LHS6230								
Shrouded Solid Steel	1-9/16" Wide Solid Steel Body. Shackle Dimensions: a: 1/4" c: 25/32"									
	7035	1-1/16"	293S6830		See List, P. 18	6830-0420	6831-0421	6830-0422	6121-0421	6121-0422
1-3/4" Wide Solid Steel Body. Shackle Dimensions: a: 5/16" c: 29/32"										
7045	1-3/16"	293S6121		Page 18	6121-0420	6841-0421	6121-0424	6121-0421	6121-0422	

Note: the 296W6000 cylinder is pinned with only 5 pins, for 6 pins order 296W7000

* NKR **N**on **K**ey **R**etaining. Key can be removed anytime.

NRK **Non **R**emovable **K**ey. Key can only be removed if shackle is in locked position.