

REKEYABLE PADLOCKS (RP)
 INTERCHANGEABLE CORE COMPATIBLE PADLOCKS (IC)
 DOOR KEY COMPATIBLE PADLOCKS (DK)
PRO SERIES CROSS REFERENCE CHARTS

MASTER LOCK KEYING ADVANTAGES:

Rekeyable Padlocks

- 8 padlock keyways available

Interchangeable Core Padlocks

- Available with or without core
- 16 cylinder options, 2 finishes
- Pinning options

Door Key Padlocks

- Available with or without cylinder
- 26 cylinder keyway options
- Pinning options

MASTER LOCK PRODUCT ADVANTAGES:

Solid Steel

- Ideal for high security applications
- Chrome plated for superior corrosion protection
- Dual deadlocking for extreme resistance to prying

Solid Brass

- Corrosion resistant for exterior applications
- Hardened boron shackle for extra cut resistance

Weather Tough®

- Weather Tough® design resists the elements
- Hardened boron shackle for extra cut resistance
- Unique FlexFit™ Cover protects the cylinder


High Security

- Heavy steel body
- Cast iron protective shroud resists bolt cutters

Safety Lockout - Solid Aluminum

- Available in six, long-lasting powder coated colors


PRO SERIES PADLOCKS - STANDARD SHACKLE/BODY DIMENSIONS

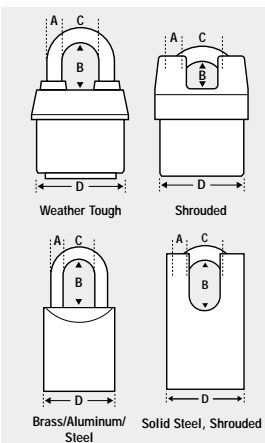


Body Type	Model Numbers			Shackle Dimensions			Body Width
	RP	IC	DK	A	B	C	D
Weather Tough	6121	6421	6621	5/16" (8mm)	1-1/8" (29mm)	7/8" (22mm)	2-1/8" (54mm)
Weather Tough	6125	-	-	3/8" (9mm)	1-3/8" (35mm)	7/8" (22mm)	2-3/8" (61mm)
Weather Tough	6127	6427	6627	7/16" (11mm)	1-3/8" (35mm)	7/8" (22mm)	2-5/8" (67mm)
Shrouded	6321	6521	6721	5/16" (8mm)	3/4" (19mm)	7/8" (22mm)	2-1/8" (54mm)
Shrouded	6325	-	-	3/8" (9mm)	3/4" (19mm)	7/8" (22mm)	2-3/8" (61mm)
Shrouded	6327	6527	6727	7/16" (11mm)	3/4" (19mm)	7/8" (22mm)	2-5/8" (67mm)
Solid Steel	6230	-	-	7/16" (11mm)	1-1/8" (29mm)	7/8" (22mm)	2-1/2" (64mm)
Solid Steel, Round Shackless	6270	-	-	3/8" (9mm)	-	-	2-7/8" (73mm)
Solid Steel	7030	7031	-	1/4" (6mm)	1-1/16" (27mm)	25/32" (20mm)	1-9/16" (40mm)
Solid Steel, Shrouded	7035	7036	-	1/4" (6mm)	1-1/16" (27mm)	25/32" (20mm)	1-9/16" (40mm)
Solid Steel	7040	7041	7042	5/16" (8mm)	1-3/16" (30mm)	29/32" (23mm)	1-3/4" (44mm)
Solid Steel, Shrouded	7045	7046	7047	5/16" (8mm)	1-3/16" (30mm)	29/32" (23mm)	1-3/4" (44mm)
Solid Steel	7050	7051	7052	3/8" (9mm)	1-1/2" (38mm)	29/32" (23mm)	1-7/8" (48mm)
Brass	6830	6831	-	1/4" (6mm)	1-1/16" (27mm)	25/32" (20mm)	1-9/16" (40mm)
Brass	6840	6841	6842	5/16" (8mm)	1-3/16" (30mm)	29/32" (23mm)	1-3/4" (44mm)
Brass	6850	6851	6852	3/8" (9mm)	1-1/2" (37mm)	29/32" (23mm)	2" (51mm)
Aluminum	6835	6836	-	1/4" (6mm)	1-1/16" (27mm)	25/32" (20mm)	1-9/16" (40mm)

Master Lock PRO SERIES CROSS REFERENCE CHARTS


REKEYABLE PADLOCKS - CYLINDER OPTIONS

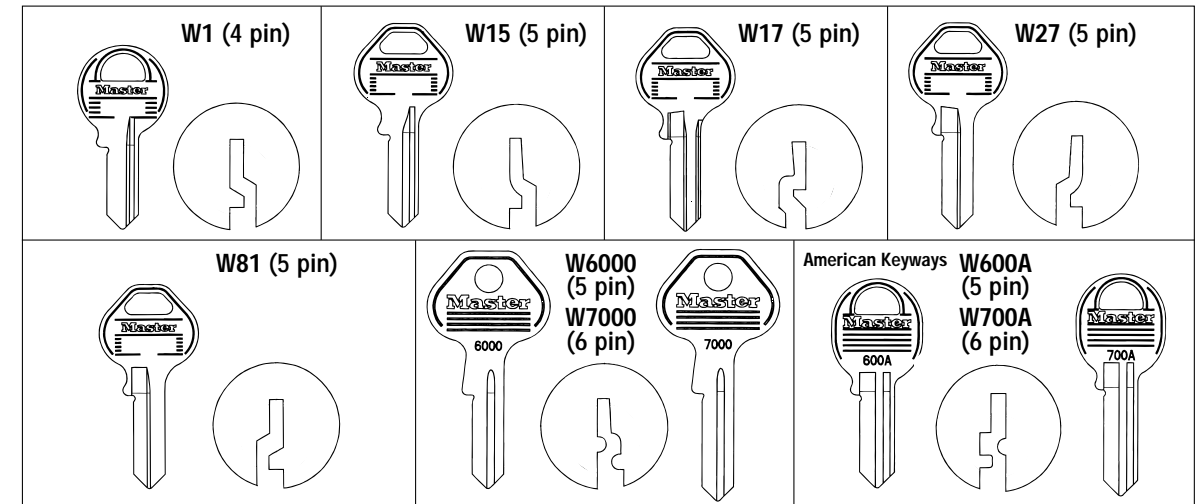

INTERCHANGEABLE CORE - KEYWAY PROFILES

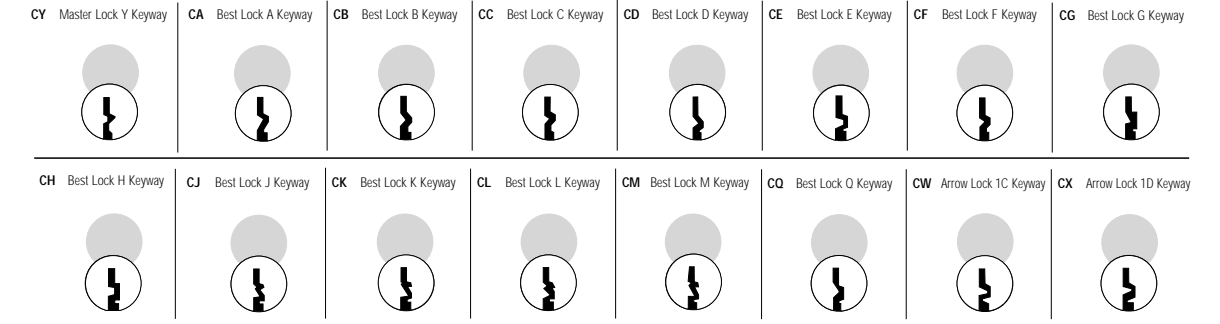

DOOR KEY COMPATIBLE PADLOCKS - CYINDER OPTIONS

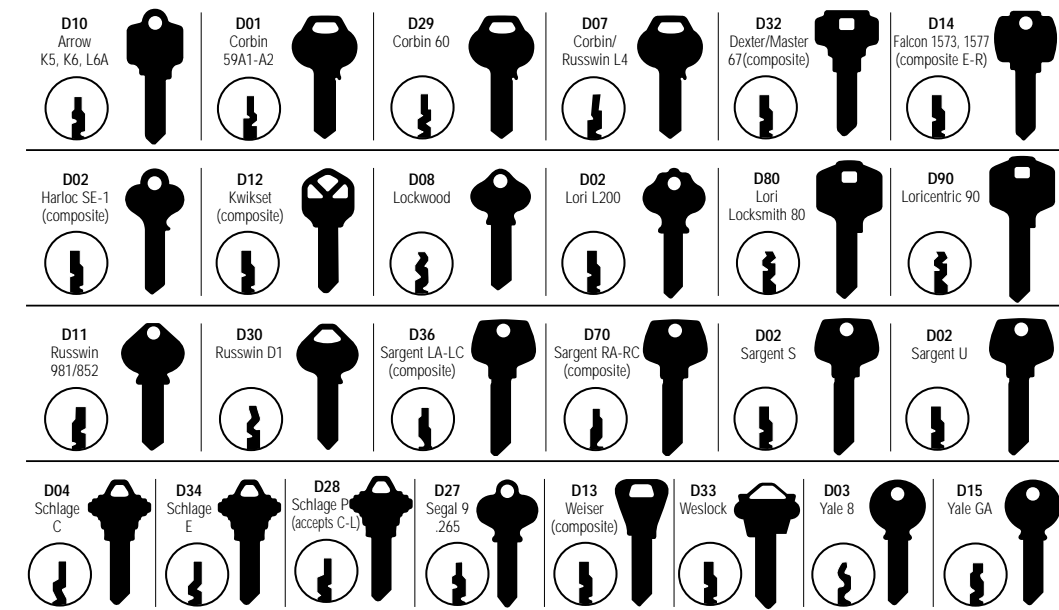

PRO SERIES CROSS REFERENCE CHARTS

	SOLID STEEL																		HIGH SECURITY									SOLID ALUMINUM					
	RP	IC	DK	RP	IC	DK	RP	IC	DK	RP	IC	DK	RP	IC	DK	RP	IC	DK	RP	IC	DK	RP	IC	DK	RP	IC	DK	RP	IC	DK	RP	IC	DK
Master Lock®	7030	7031	-	7035	7036	-	7040	7041	7042	7045	7046	7047	7050	7051	7052	6230	-	-	6270	-	-	6321	6521	6721	6325	-	-	6327	6527	6727	6835	6836	-
American Lock®	5100	-	-	-	-	-	5200	3200	-	5300	-	-	5260	3260	-	700	-	-	2000 or 2010	-	-	-	-	-	-	-	-	-	-	-	1105	3105	-
Abus®	-	-	-	-	-	-	-	-	-	-	-	-	-	70810	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
Almont®	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
Wilson Bohannon®	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
Best®	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			

	SOLID BRASS									WEATHER TOUGH®								
	RP	IC	DK	RP	IC	DK	RP	IC	DK	RP	IC	DK	RP	IC	DK	RP	IC	DK
Master Lock®	6830	6831	-	6840	6841	6842	6850	6851	6852	6121	6421	6621	6125	-	-	6127	6427	6627
American Lock®	5530	-	-	5560	3560	3600	5570	3570	3700	-	-	-	-	-	-	-	-	-
Abus®	-	-	-	-	83IC/45(tm)-1	83/45	-	-	-	-	-	-	-	-	-	-	-	-
Almont®	112	-	112-	134	-	134-	-	-	-	-	-	-	-	-	-	-	-	-
Wilson Bohannon®	112	-	-	612	8512	-	922	8612	-	-	-	-	-	-	-	-	-	-
Best®	-	11B72	-	-	21B72	-	-	41B72	-	-	-	-	-	-	-	-	-	-

Length	EXTRA LENGTH SHACKLE OPTIONS			
	Solid Steel	Solid Aluminum	Solid Brass	Weather Tough
1-9/16"	7030LF, 7031LF	6835LF*, 6836LF*	6830LF*, 6831LF*	6830LF*
1-7/8"	-	-	-	6427LH, 6627LH, 6127LH
2"	6230LH	-	-	-
2-3/8"	-	-	-	6421LJ*, 6621LJ, 6127LJ
2-1/2"	7040LJ, 7050LJ, 7042LJ, 7052LJ, 7041LJ, 7051LJ	-	6840LJ*, 6841LJ*, 6850LJ*, 6842LJ*, 6852LJ*, 6851LJ*	6121LJ*, 6125LJ*
3"	7030LT, 7031LT	6835LT, 6836LT	6830LT, 6831LT	-

* Brass shackle available

- See the Master Lock Full Line Catalog for Various Padlock Cylinders, Interchangeable Cores and Door Key Compatible Cylinders
- Master Lock Solid Aluminum padlocks available in 6 durable colors

	SPEED INDEX																	
	700	1105	2000	2010	3200	3260	3560	3570	3600	3700	5100	5200	5260	5300	5530	5560	5570	
American Lock®	700	1105	2000	2010	3200	3260	3560	3570	3600	3700	5100	5200	5260	5300	5530	5560	5570	
Master Lock®	6230	6835	6270	6270	7041	7051	6841	6851	6842	6852	7030	7040	7050	7045	6830	6840	6850	
RP, IC, DK	Rekeyable	Rekeyable	Shackleless Rekeyable	Shackleless Rekeyable	IC Core	IC Core	IC Core	IC Core	Door Key Compatible	Door Key Compatible	Rekeyable	Rekeyable	Rekeyable	Shrouded Rekeyable	Rekeyable	Rekeyable	Rekeyable	
Body Width	2 1/2" (64mm) Round	1 9/16" (40mm)	2 7/8" (73mm) Round	2 7/8" (73mm) Round	1 3/4" (44mm)	2" (51mm)	1 3/4" (44mm)	2" (51mm)	1 3/4" (44mm)	2" (51mm)	1 9/16" (40mm)	1 3/4" (44mm)	2" (51mm)	1 3/4" (44mm)	1 9/16" (40mm)	1 3/4" (44mm)	2" (51mm)	
Material	Steel	Aluminum	Steel	Steel	Steel	Steel	Brass	Brass	Brass	Brass	Steel	Steel	Steel	Steel	Brass	Brass	Brass	

Note: Master Lock can provide both IC cores and Door Key compatible cylinders